




Quick Installation Guide

INDOOR WIRELESS HD IP CAMERA
Model: iSG-CAM-01W

V1.1

What's in the box




IP Camera



USB Power Cable




AC Adapter



Resource CD





Quick Installation Guide




Ethernet Cable

Meet the iSmartgate Cam (indoor model)

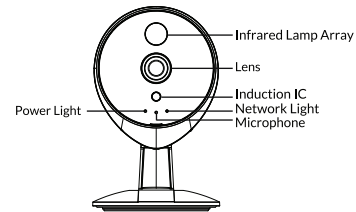


Network Light	Description
Constant Flash	Wired connection
Flashing every 0.2 seconds	EZLink takes effect (default)
Flashing every 0.4 seconds	WPS is connecting
Slow Flash every 1.0 second	Wi-Fi connected

1. Turning on your Camera



1



2

1. Turn on your iSmartgate IP Camera using the provided power supply (do NOT use the Ethernet - RJ45 cable).
2. Wait for a moment, until the camera plays a sound "Ready for WiFi configuration" and blue light starts blinking. This means camera is ready for Wi-Fi set up.
3. Connect your Smartphone to the same Wi-Fi network where you will connect the iSmartgate IP Camera (internet required).
4. Download the iSmartgate Cam app for your iPhone or Android phone.

2. Setting up your user account

1. Open the iSmartgate Cam
2. Press the "Register Now" button if you are setting up an iSmartgate IP camera for the first time.
3. Fill in all the fields: email, password and new password. Select your country and accept terms and conditions. Press "Register" button afterwards.
4. Wait for confirmation email and press Login.
5. Login with your iSmartgate Cam account.

3. Setting up your IP Camera

1. Press the "+" sign to add your IP Camera.
2. Tap the "Scan QR Code" button to add your camera (P2P connection). (Optional: You can also manually add the UID* code).
3. Scan the QR code at the back of your IP Camera with your Smartphone.
4. Select Wi-Fi mode (wireless set up). In the "Set up" menu, check scanned UID* and Wi-Fi network name are correct.
5. If so, introduce your Wi-Fi network password (WLAN Password). Field is case sensitive.
6. Press CONNECT button. Wait 30-120 seconds until camera is successfully connected.

***UID:** This code identifies your IP camera. This code is unique and can be found next to the scannable QR code of your iSmartgate IP Cam.

4. Syncing iSmartgate devices


Your iSmartgate Cam can be paired with the Gogogate2 and iSmartgate products. By combining the iSmartgate Cam with such devices, you will be able to remotely control, monitor and watch your garage door or gate from a single app.

Instructions on how to pair your iSmartgate Cam with these products can be found here:

www.ismartgate.com/isg_cam/connect.html

5. Hardware Installation

1. Rotate the base of the camera until points A and B are aligned, this allows for the mounting plate to be removed.
2. Install the mounting plate on a wall or ceiling with supplied fixing screws.
3. Align points A and B to insert the camera base to the mounting plate. Rotate so that points A and B are no longer aligned, this attaches the camera securely to the base.

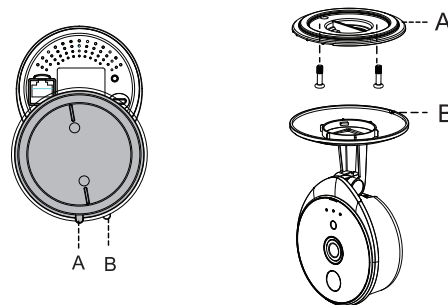

6. FAQ

Forget Username / Password

Restore camera back to factory settings:

1. Press "Reset" button for about 10 seconds with camera powered on.
2. Release the button and wait about 30 seconds, the camera will automatically restart, and restore factory settings with:

Username = admin

Password =(blank)

Please Note:

- After restoring IP camera to factory default settings; please follow Setup process to connect IP camera to your Wi-Fi network again.
- In case you fail adding your IP camera to your Wi-Fi network, please use the WPS connection. Instructions can be found in supplied CD, in the IP camera User Manual.

ismartgate Cam

www.ismartgate.com

Need help?

support@ismartgate.com

