



PRODUCT DESCRIPTION

The **GoGoGate-01W** is an electronic device conceived to remotely operate three (3) relay outputs via your Smartphone (iOS or Android). Although the device can operate any automated system that is relay based such as sprinkler systems, lights and blinds, the primary use of the GoGoGate is the operation of garage doors and gates.



**100%
Secure**



**Easy
Installation**



**Internet
Remote Access**



**Multiple
Users**



**Door Status
Indicator**



**Multiple Home
Applications**



THE EASY WAY TO OPEN YOUR GARAGE OR GATE

TECHNICAL SPECIFICATION

WIRELESS LAN INTERFACE

STANDARD COMPLIANCE	IEEE802.11n, IEEE802.11g, IEEE802.11b
	Transmission Rates 11n: 150Mbps
	11g: 6/9/12/18/24/36/48/54 Mbps
	11b: 1/2/5.5/11Mbps
FREQUENCY RANGE	Channel 1-13
ANTENNA GAIN	5dBi
SECURITY	WPA2-PSK(TKIP/AES), WPA-PSK(TKIP/AES), 128/64-bit WEP
USB	2.0

SD CARD

STANDARD COMPLIANCE	SD Class 4
MEMORY SPACE	4Gb
TYPE	SDHC

OUTPUT INTERFACE

OUTPUT TYPE	Volt Free Contact
OUTPUTS	3 relay outputs
MAXIMUM VOLTAGE	60V DC @ 2A

RF RECEIVER


FREQUENCY	433.92Mhz receiver
MODULATION	OOK
RANGE	APPROX 50m or 150ft (outdoors)

OTHER

DIMENSIONS (WDXH)	116 x 110 x 29 mm
WEIGHT	approx. 430g
OPERATING ENVIRONMENT	-10°C to 40°C, 10-90% (non-condensing)
POWER CONSUMPTION	max. 10W
POWER SUPPLY	External AC 100-240V universal, 50/60hz

APPROVALS

CE,FCC

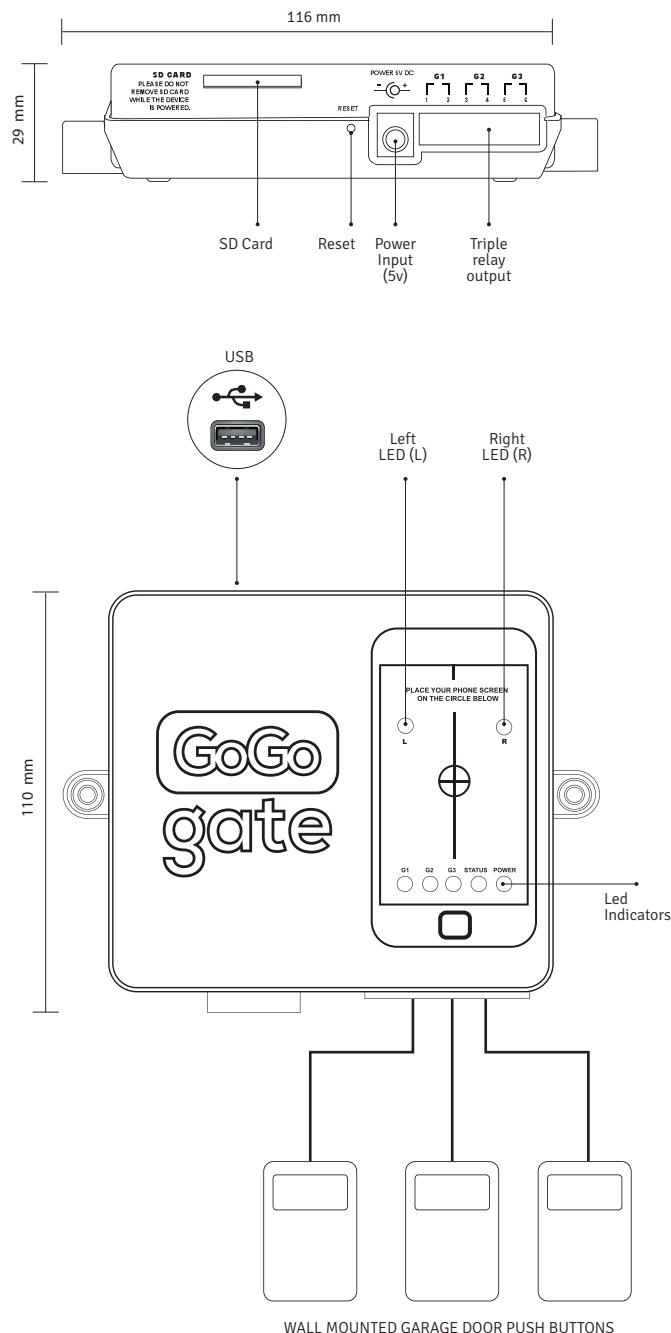

REMSOL USA
26 Center St, COLLINSVILLE CT
06019 USA
www.remsolusa.com

REMSOL EUROPE
C/Ponent nº8, SUBIRATS
08739 SPAIN
www.remsoleurope.com